Unibat Lithium eXtra

# ULT03

*Extra performance lithium battery*

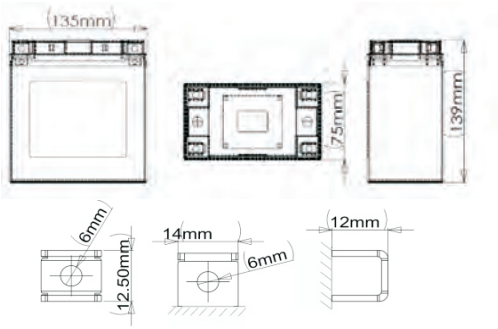

| SPECIFICATION | PARAMETERS | | REMARKS |
|---|---|---|---|
| Nominal Voltage | 12.8V | | |
| Capacity | 5.0AH | | 0.2C discharge |
| Dimension(mm) | 135*75 *139 | | |
| Approximate weight | 0.95 kgs | | |
| CCA | 300 A | | By digital Tester |
| Internal Resistance | < 100mΩ | | |
| SLA replacement | YTX14AH-BS | | Motorcycle 125~250CC |
| Charge | Charge Voltage | 14.4V | |
| | Standard charge current | 2.5A | 0.5C |
| | Max. continuous Charge current | 10A | 2C |
| Discharge | Discharge Cut off Voltage | 10V | |
| | Continuous discharge current | 150A | 30C |
| | Max. pulse discharge current | 300A | 60C |
| Temperature | Charging temperature | 0℃~45℃ | |
| | Discharge temperature | -10℃~60℃ | |
| | Storage temperature | -20℃~40℃ | |
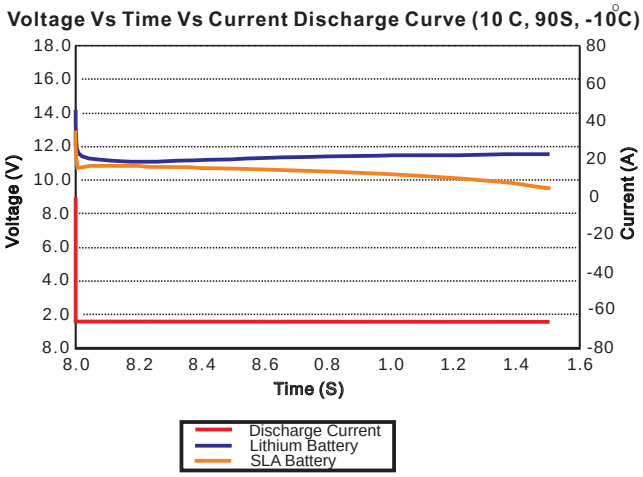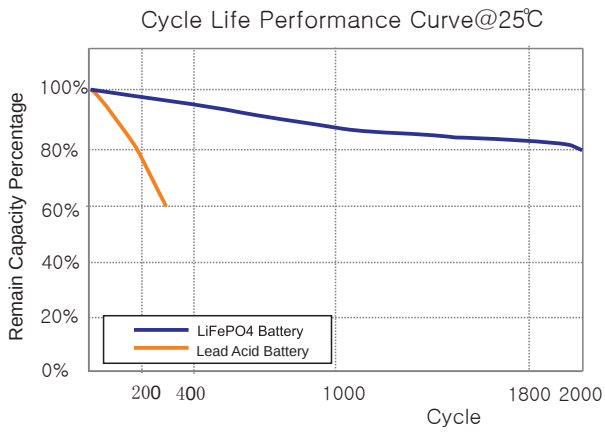
## Discharge Characteristic